
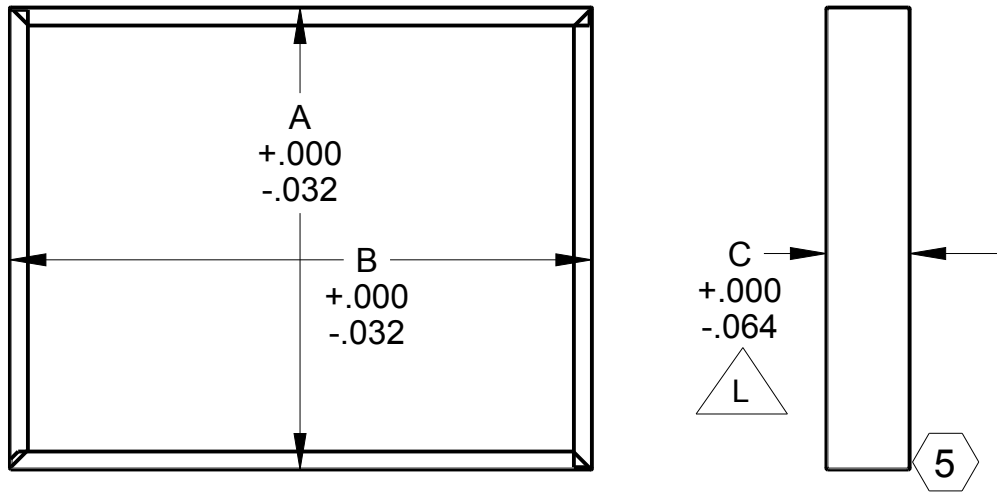


MODEL #	DESCRIPTION	NOMINAL, AxBxC	ACTUAL, AxBxC
B31222	BPSL PNL, COCO/PERM	20 X 25 X 4	19.25 X 24.25 X 3.500
B31224	BPSL PNL, COCO/PERM	16 X 20 X 4	15.25 X 19.25 X 3.500
B31225	BPS PNL, COCO	12 X 12 X 4	11.25 X 11.25 X 3.500
B31226	BPSL PNL PERM	20 X 25 X 4	19.25 X 24.25 X 3.500
B31227	BPSL PNL PERM	16 X 20 X 4	15.25 X 19.25 X 3.500
B31228	BPSL PNL KOH	16 X 20 X 4	15.25 X 19.25 X 3.500
B31229	BPSL PNL KOH	20 X 25 X 4	19.25 X 24.25 X 3.500
B31230	BPSL PNL COCO	16 X 20 X 4	15.25 X 19.25 X 3.500
B31231	BPSL PNL COCO	20 X 25 X 4	19.25 X 24.25 X 3.500

REV	ECN NO.	DESCRIPTION	BY	DATE
J	1738	REVISED GASKETING	MB	02-23-15
K	1775	CHANGED FRAME CONSTRUCTION, TOLERANCES, AND GASKET.		07-08-15
L	1800	CHANGED THICKNESSES, 3.625 TO 3.500	MB	10-22-15

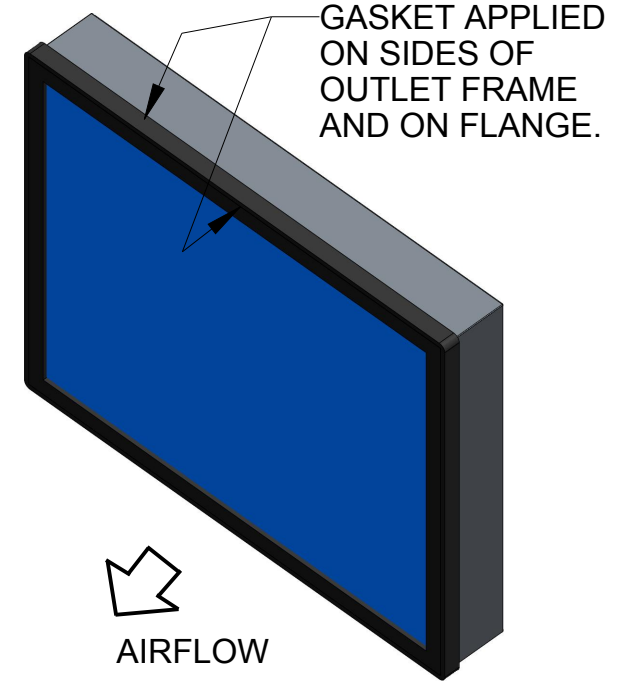


5. DIMENSIONS AT CORNERS AFFECTED BY OVERLAP OF MATERIAL THICKNESS.

- BPS LITE ACTIVATED CARBON PAD FILTER IN A 24 GA GALVANIZED STEEL FRAME, WITH WIRE SUPPORT.
- MINIMUM 60 CTC ACTIVITY CARBON.
- THE CARBON PANEL SHALL BE PROTECTED WITH MERV 6 POLYESTER ON BOTH SIDES.
- GASKET ON DOWNSTREAM AIRFLOW SIDE: PRES-ON P/N 10010081. UVDI P/N B50-10031.

NOTES:
(UNLESS OTHERWISE SPECIFIED)

This drawing contains proprietary information of UltraViolet Devices, Inc. By accepting this drawing the recipient agrees that this drawing will not be used, reproduced in whole or in part, or its contents revealed to others, except to meet the purposes for which it was delivered. It is understood that no right is conveyed to reproduce or to have reproduced any item herein disclosed without express permission from UltraViolet Devices, Inc.

 UltraViolet Devices, Inc. Valencia, California			
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES UNLESS OTHERWISE SPECIFIED X.X ± 0.1 X.XX ± 0.03 X.XXX ± 0.015 X.X" ± 0.5"		DESCRIPTION <h2 style="text-align: center;">BPS LITE FILTERS</h2>	
PART NO.		L	
B31222		REV	
DRAWN	DATE	ENGR	DATE
MB	Feb-23-15		
CHK	DATE	GEN. MNGR.	DATE
A	.125	1 OF 1	
SIZE	SCALE	SHEET	